







Downlights & Globes

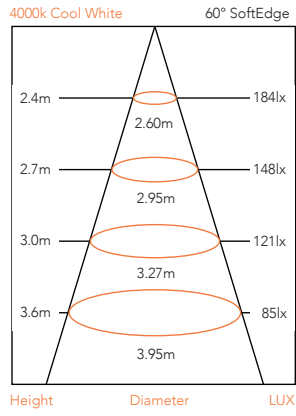

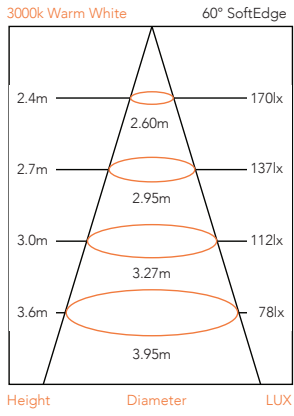

Predator

LED
CRI 97
3000K 4000K
IP 54
DIMMABLE




Recommended dimmers: Clipsal LED

Satin Chrome finish | White finish

85-90mm Cut Out
60° Beam angle
C/w LED Driver, Flex & Plug

ThermoARC heatsink with pinfin design
IC-F Abutted & Covered
C-Bus compatible

Model No	Description	Light Source	Lumens	Dimensions
PREDLSC3000K	Satin Chrome LED Downlight	1 x 12w COB 3000k	1040Lm	W: 110mm H: 90mm
PREDLSC4000K	Satin Chrome LED Downlight	1 x 12w COB 4000k	1080Lm	W: 110mm H: 90mm
PREDLW3000K	White LED Downlight	1 x 12w COB 3000k	1040Lm	W: 110mm H: 90mm
PREDLW4000K	White LED Downlight	1 x 12w COB 4000k	1080Lm	W: 110mm H: 90mm

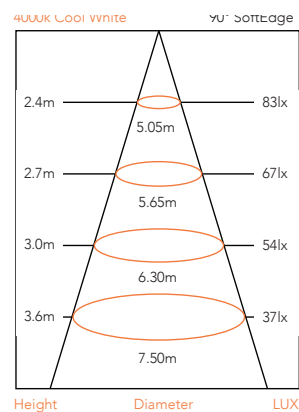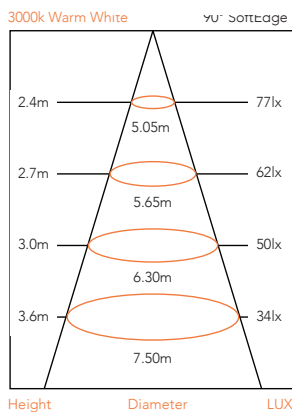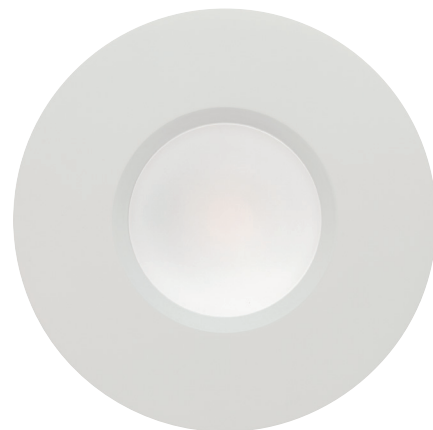

Raptor









Recommended dimmers:
Clipsal LED

Satin Chrome finish | White finish | Opal lens

85-90mm Cut Out
100° Beam angle
M-DCOB internal AC driverless
C/w Flex & Plug

ThermoARC heatsink with pinfin design
IC-F Abutted & Covered
C-Bus compatible

Model No	Description	Light Source	Lumens	Dimensions
RAPDLS3000K	Satin Chrome LED Downlight	1 x 9w COB 3000k	820Lm	W: 110mm H: 42.50mm
RAPDLS4000K	Satin Chrome LED Downlight	1 x 9w COB 4000k	840Lm	W: 110mm H: 42.50mm
RAPDLW3000K	White LED Downlight	1 x 9w COB 3000k	820Lm	W: 110mm H: 42.50mm
RAPDLW4000K	White LED Downlight	1 x 9w COB 4000k	840Lm	W: 110mm H: 42.50mm

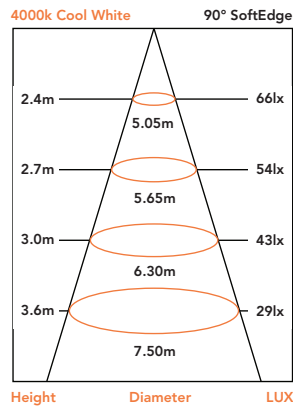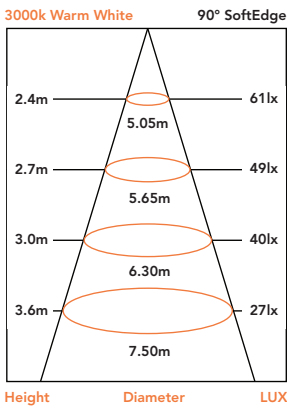

Talas

LED
CRI 85
3000K 4000K
IP 54
DIMMABLE

Recommended dimmers: Clipsal LED

White finish

90mm Cut Out
 100° Beam angle
 M-DCOB internal AC driverless
 V0 Fire Rated injection mould PC housing

6063 Aluminium In-built heatsink
 C/w Flex & Plug
 IC-F Abutted & Covered

Model No	Description	Light Source	Lumens	Dimensions
TALDLW3000K	White LED Downlight	1 x 8w COB 3000k	752Lm	W: 114mm H: 65mm
TALDLW4000K	White LED Downlight	1 x 8w COB 4000k	784Lm	W: 114mm H: 65mm



GU10 LED Globes

LED

CRI 80


3000K
4000K

DIMMABLE

Recommended dimmer:
Clipsal LED

60° Beam angle
265Volt Surge Protection
Soft Edge Reflector

Do NOT use with timers
Do NOT use with sensor lights

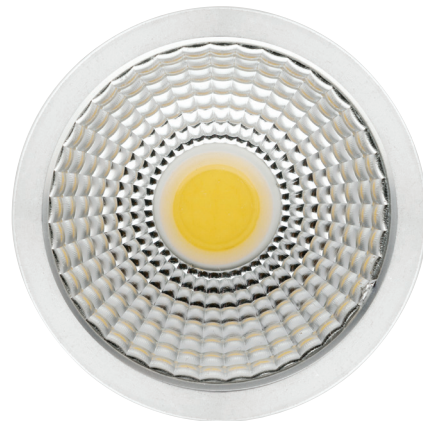

MR16 LED Globes

LED

CRI 80

3000K
4000K

Recommended Transformers:
Iron Core
Cougar SET 60
Osram Redback
Actec
Clipsal
Tridonic Atco Viper

60° Beam angle
Soft Edge Reflector

Model No	Description	Light Source	Lumens	Dimensions
LEDGU105W 3000KD, 4000KD	GU10 5W LED Globe	1 x 5w COB 3000k, 4000k	450Lm/470Lm	W: 50mm H: 57mm
LEDGU107W 3000KD, 4000KD	GU10 7W LED Globe	1 x 7w COB 3000k, 4000k	640Lm/660Lm	W: 50mm H: 57mm
LEDMR165W 3000K, 4000K	MR16 5W LED Globe	1 x 5w COB 3000k, 4000k	430Lm/460Lm	W: 50mm H: 52mm
LEDMR167W 3000K, 4000K	MR16 7W LED Globe	1 x 7w COB 3000k, 4000k	580Lm/600Lm	W: 50mm H: 52mm